

Appendix B: Stream Protection Zone Requirements

The purpose of this appendix is to assist the permittee in complying with the requirements in Part III.A.2.a of the permit regarding the establishment of Stream Protection Zones and/or additional sediment controls. This appendix is organized as follows:

Contents

[HYPERLINK \l "_Toc38621981"]
[HYPERLINK \l "_Toc38621982"]
[HYPERLINK \l "_Toc38621983"]
[HYPERLINK \l "_Toc38621984"]
[HYPERLINK \l "_Toc38621985"]

[TOC \o "1-3" \h \z \u]

1. Construction Sites that are Required to Provide and Maintain Stream Protection Zones

Vegetated buffers (referred in this Appendix as buffers) are important filters that protect water quality. When construction occurs and results in runoff that isn't filtered by a substantial buffer, it has a much greater potential to impact perennial and intermittent streams. The requirement in Part III.A.2.a of the 20-CP is to provide and maintain a Stream Protection Zone, made up of either a natural vegetated buffer and/or additional erosion and sediment controls. This Stream Protection Zone is measured from the edge of stream to at least 50 feet for Tier I watersheds, or an average of 100 feet and not less than 50 feet at any point for Tier II watersheds. Tier II Watersheds merit additional protection to maintain their high-quality status. The average 100 feet for Tier II is for the consideration of natural topography or site conditions, such as avoiding work on steep slopes; however may not be considered less than 50 feet at any point. The additional erosion and sediment controls in this appendix do not apply if the construction activity doesn't occur within the Stream Protection Zone. If the project can avoid earth disturbance in the required protection zone, then the minimum controls found in Maryland's Erosion and Sediment Control Handbook shall suffice for the project. See Figure B-1.

Style Definition: Normal: Font: (Default) Calibri
Style Definition: List Paragraph: Font: (Default) Calibri
Style Definition: Comment Text: Font: (Default) Calibri
Style Definition: Comment Subject: Font: (Default) Calibri
Style Definition: Header: Font: (Default) Calibri
Style Definition: Footer: Font: (Default) Calibri
Style Definition: TOC 2: Font: (Default) Calibri
Style Definition: Caption: Font: (Default) Calibri
Style Definition: Endnote Text: Font: (Default) Calibri
Style Definition: Footnote Text: Font: (Default) Calibri
Formatted
Formatted: Font: +Headings (Calibri Light)

Formatted: Font: Calibri
Formatted: Indent: Left: 0", Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0.25" + Indent at: 0.5"

Commented [A1]: Please explain what is meant by an average buffer. Or show a graphic depiction for clarity.
Commented [A2]: Waterbodies or watersheds? The previous sentence lists Tier II watersheds. Recommend using one term for consistency.

Formatted: Normal, Indent: Left: 0.5", Line spacing: single, Border: Top: (No border), Bottom: (No border), Left: (No border), Right: (No border), Between : (No border)

Formatted: Default Paragraph Font, Font: Calibri

Formatted: Hyphenate

Formatted: Default Paragraph Font, Font: Calibri

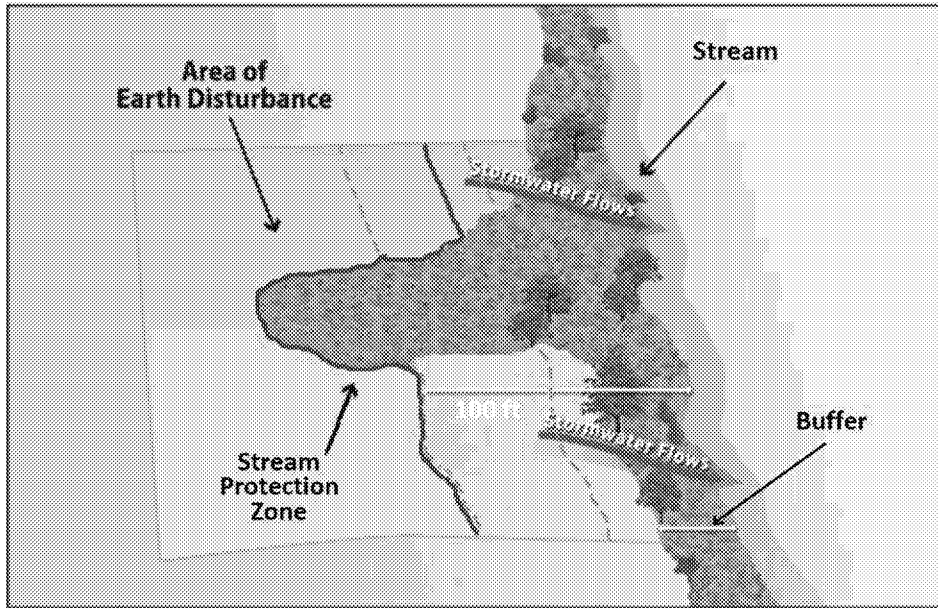
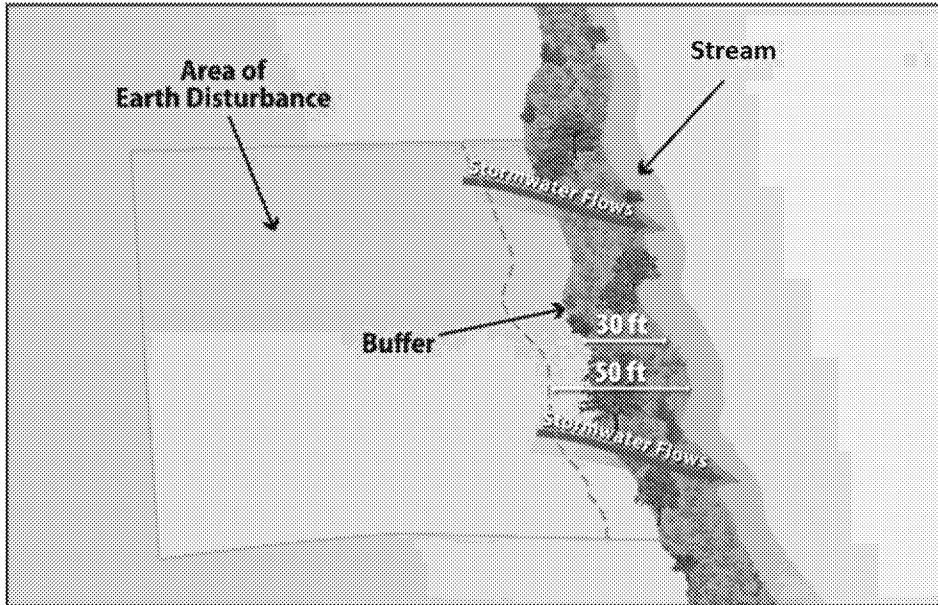


Figure B-1 Example of earth-disturbing activities within 50-foot Stream Protection Zone of a Tier III Stream.

2. Compliance Stream Protection Zone Alternatives¹

If any portion of a project is in a Stream Protection Zone, permittees you have two compliance Stream Protection Zone alternatives from which to choose, unless the site qualifies you qualify for any of the exceptions (see below (see and Part 3 of this Appendix). The compliance Stream Protection Zone alternative selected must be maintained throughout the duration of permit coverage.

Compliance Stream Protection Zone Alternative 1: Provide and maintain an undisturbed natural buffer within the Stream Protection Zone; or

Compliance Stream Protection Zone Alternative 2: Provide and maintain an undisturbed natural buffer that is less than the specific Stream Protection Zone and implement supplemental¹ is supplemented by additional erosion and sediment controls. The acceptable additional erosion and sediment controls include, but are not limited to, those listed in the 2011 ESC Handbook. These acceptable additional erosion and sediment controls are accelerated stabilization, redundant controls, upgraded controls, passive or active chemical treatment, or a reduction in the size of the grading unit. These options are explained in more detail below, and are the controls that must be considered and once selected, implemented when construction activity occurs within the Stream Protection Zone. The local approval authorities may provide additional options that provide similar protection.

a. Accelerated Stabilization Requirements

Earth disturbance must be stabilized as soon as possible and as dictated by the approved plan (e.g., seed and mulch, soil stabilization matting, rip rap, sod, pavement):

- At a minimum, all perimeter controls (e.g., earth dikes, sediment traps) and slopes steeper than 3:1 require stabilization within three calendar days and all other disturbed areas within seven calendar days
- Accelerated stabilization (e.g., same day stabilization) may be required based on site characteristics or as specified by the approval authority

b. Redundant Controls

¹ For projects in Tier II Watersheds, when you complete the Checklist (Appendix C) as part of your antidegradation review (Part III.B.2), these compliance Stream Protection Zone alternatives are the elements you will include on the Checklist to verify your evaluation of planned protections in Stream Protection Zones.

Formatted: Default Paragraph Font, Font: Calibri

Formatted: Hyphenate

Formatted: Default Paragraph Font, Font: Calibri

Formatted: Font color: Black

Formatted: Font color: Black

Formatted: Normal, Space After: 10 pt, Border: Top: (No border), Bottom: (No border), Left: (No border), Right: (No border), Between : (No border)

Formatted: Font color: Black

Formatted: Font color: Black

Formatted: Font Bold, Font color: Black

Formatted: Indent Left: 0", Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0.25" + Indent at: 0.5"

Formatted: Font: Calibri

Formatted: Default Paragraph Font, Font: Calibri

Formatted: Font: Calibri

Formatted: Normal, Indent Left: 0", Border: Top: (No border), Bottom: (No border), Left: (No border), Right: (No border), Between : (No border)

Formatted: Font color: Black

Formatted: Font color: Black

Commented [A3]: Is there a minimum buffer less than 50' that must be maintained? Theoretically this sounds like someone can develop right up to the edge of stream as long as they use additional E&S controls. There should be more specifications for Alternative #2.

Formatted: Font color: Black

Formatted: Font color: Black

Formatted: Font color: Black

Formatted: Font color: Black

Formatted: Normal, Outline numbered + Level: 1 + Numbering Style: Bullet + Aligned at: 0.75" + Indent at: 1", Border: Top: (No border), Bottom: (No border), Left: (No border), Right: (No border), Between : (No

Formatted: Font color: Black

Formatted

Formatted

Formatted: Font color: Black

Formatted: Font color: Black

Formatted: Default Paragraph Font, Font: Calibri

Formatted: Hyphenate

Formatted: Default Paragraph Font, Font: Calibri

Runoff must pass through two sediment control devices in series. The following are examples of possible combinations:

- When dewatering sump areas, sediment traps, or sediment basins, discharge sediment laden water first to a portable sediment tank and then a filter bag
- Install parallel rows of a perimeter filtering control or a combination thereof of silt fence, super silt fence, and filter logs (e.g., two rows of parallel silt fence or a row of filter log parallel to a row of super silt fence)

Formatted: Font color: Black

Formatted: Normal, Outline numbered + Level: 1 + Numbering Style: Bullet + Aligned at: 0.75" + Indent at: 1", Border: Top: (No border), Bottom: (No border), Left: (No border), Right: (No border), Between : (No

c. Upgrade Controls

The following are examples of possible upgrades:

- Upgrade from silt fence to super silt fence
- Upgrade from a temporary stone outlet structure to a temporary gabion outlet structure
- Upgrade all sediment traps and basins to control additional storage volume; increase the required storage volume from 3,600 cubic feet/acre to 5,400 cubic feet/acre
- Upgrade standard inlet protection type A to type B and upgrade at grade inlet protection to gabion inlet protection

Formatted: Font color: Black

Formatted: Normal, Indent: Left: 0.5", Outline numbered + Level: 1 + Numbering Style: a, b, c, ... + Start at: 1 + Alignment: Left + Aligned at: 0.25" + Indent at: 0.5", Border: Top: (No border), Bottom: (No border), Left: (No border), Right: (No border), Between : (No border)

Formatted: Font color: Black

Formatted: Normal, Outline numbered + Level: 1 + Numbering Style: Bullet + Aligned at: 0.75" + Indent at: 1", Border: Top: (No border), Bottom: (No border), Left: (No border), Right: (No border), Between : (No

Formatted: Add space between paragraphs of the same style

Formatted: Font color: Black

d. Passive or Active Chemical Treatment

See Part III.A.2.m of this permit for more information on chemical treatment.

Formatted: Normal, Indent: Left: 0.5", Outline numbered + Level: 1 + Numbering Style: a, b, c, ... + Start at: 1 + Alignment: Left + Aligned at: 0.25" + Indent at: 0.5", Border: Top: (No border), Bottom: (No border), Left: (No border), Right: (No border), Between : (No border)

Formatted: Add space between paragraphs of the same style

Formatted: Add space between paragraphs of the same style

Formatted: Font color: Black

Formatted

e. Reduction in the Size of the Grading Unit

- Require grading unit limitations to 10 acres of earth disturbance inside the Stream Protection Zone
- Require grading unit limitations to 20 acres for any earth disturbance that is adjacent to and contiguous with earth disturbances inside the Stream Protection Zone

Formatted: Add space between paragraphs of the same style

Formatted: Font color: Black

Formatted

f. Prerogative of Approval Authorities

The additional controls described above for projects in Stream Protection Zones are examples of accelerated stabilization, redundant controls, upgraded controls, passive or active chemical treatment, or a reduction in the size of the grading unit. Approval authorities may use these examples as a guide when approving projects, but may also

Formatted: Font color: Black

Formatted

Formatted: Font color: Black

Formatted

Formatted: Default Paragraph Font, Font: Calibri

Formatted: Hyphenate

Formatted: Default Paragraph Font, Font: Calibri

apply further erosion and sediment control measures based on local site conditions, local regulations/ordinances, and best professional judgement.

3. Exceptions to the Compliance Stream Protection Zone Alternatives

The following exceptions apply to the requirement to implement one of the compliance Stream Protection Zone alternatives (see Part 2 of this Appendix):

- The following disturbances within the Stream Protection Zone are exempt from the requirements of Part III.A.2.a of the general permit and this Appendix:
 - Construction approved under a CWA Section 404 permit; or
 - Construction of a water-dependent structure or water access areas (e.g., pier, boat ramp, trail).
- If there is no discharge of stormwater to Waters of this State through the area between the disturbed portions of the site and any waters of the U.S. tributary or waterbody located within 50 feet of the site, permittees measured Stream Protection Zone, you are not required to comply with the requirements in Part III.A.2.a and this Appendix. This includes situations where permittees you have implemented controls measures, such as a berm or other barrier, which will prevent such discharges. Note that Waters of this State as defined in Appendix A includes both surface and underground waters.
- Where no natural buffer exists due to preexisting development disturbances (e.g., structures, impervious surfaces) that occurred prior to the initiation of planning for the current development of the site, permittees you are not required to comply with the requirements in Part III.A.2.a and this Appendix.

Where some natural buffer exists but portions of the area within the Stream Protection Zone are occupied by preexisting development disturbances, permittees you are required to comply with the requirements in Part III.A.2.a and this Appendix. Clarity about how to implement the compliance Stream Protection Zone alternatives for these situations is provided in Parts 4 and 5 below.

- For "linear construction sites" (see Appendix A), permittees you are not required to comply with this requirement if site constraints (e.g., limited right-of-way) make it infeasible to implement one of the above compliance Stream Protection Zone alternatives, provided that, to the extent feasible, you limit disturbances within 50 feet of any Waters of this State are limited and/or you provide supplemental erosion and sediment controls to treat stormwater discharges from earth disturbances within 50 feet of the Waters of this State are provided. For Tier II waters, permittees watersheds, you must also document in the Checklist the your rationale for why it is infeasible for you to implement one of the above compliance Stream Protection Zone alternatives, and describe any buffer width retained and supplemental erosion and sediment controls installed.

Formatted: Font: Calibri

Formatted: Indent Left: 0", Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0.25" + Indent at: 0.5"

Formatted: Font: Calibri

Formatted: Font color: Black

Formatted: Normal, Outline numbered + Level: 1 + Numbering Style: Bullet + Aligned at: 0.25" + Indent at: 0.5", Border: Top: (No border), Bottom: (No border), Left: (No border), Right: (No border), Between : (No border)

Formatted: Font color: Black

Formatted: Font color: Black

Formatted: Font color: Black

Formatted: Font color: Black

Formatted: Font color: Black

Formatted: Font color: Black

Commented [A4]: To remind permittees that although a surface waterbody may not be near the site, they may be ...

Formatted

Formatted: Font color: Black

Formatted: Font color: Black

Formatted: Font color: Black

Formatted

Formatted: Font color: Black

Formatted: Font color: Black

Formatted: Font color: Black

Formatted: Font color: Black

Formatted: Font color: Black

Formatted: Font color: Black

Commented [A5]: See comment above related to water ...

Formatted: Font color: Black

Formatted: Font color: Black

Formatted: Font color: Black

Formatted: Font color: Black

Formatted: Default Paragraph Font, Font: Calibri

Formatted: Hyphenate

Formatted: Default Paragraph Font, Font: Calibri

Note that ~~it you must be documented~~ document in ~~the your~~ SWPPP (if required under the conditions of Part III.F.1) if any disturbances related to any of the above exceptions occurs within the buffer area on ~~your~~ site.

4. Requirements for Providing and Maintaining Natural Buffers

Formatted: Font: Calibri

Formatted: Indent Left: 0", Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0.25" + Indent at: 0.5"

This part of the appendix applies to ~~permittees that you~~ if you choose ~~compliance~~ Stream Protection Zone alternative 1 (avoid Stream Protection Zone), or ~~compliance~~ Stream Protection Zone alternative 2 (work within the Stream Protection Zone supplemented by additional erosion and sediment controls described above).

Stream Protection Zone Measurement

~~When~~Where you are retaining a buffer of any size, the buffer should be measured perpendicularly from any of the following points, whichever is further landward from the water:

- The ordinary high water mark of the water body, defined as the line on the shore established by fluctuations of water and indicated by physical characteristics such as a clear, natural line impressed on the bank, shelving, changes in the character of soil, destruction of terrestrial vegetation, and/or the presence of litter and debris; or
- The edge of the stream or river bank, bluff, or cliff, whichever is applicable.

Formatted: Font color: Black

Formatted: Normal, Outline numbered + Level: 1 + Numbering Style: Bullet + Aligned at: 0.25" + Indent at: 0.5", Border: Top: (No border), Bottom: (No border), Left: (No border), Right: (No border), Between : (No border)

Refer to Figure B-2 and Figure B-3 for visual/graphic depictions of how to properly measure the buffer.



~~Permittees~~You may find that specifically measuring these points is challenging if the flow path of the Water of this State changes frequently, thereby causing the measurement line for the buffer to fluctuate continuously along the path of the waterbody. Where this is the case, the Department suggests that rather than measuring each change or deviation along the water's edge, it may be easier to select regular intervals from which to conduct your measurement. For instance, you may elect to conduct your buffer measurement every 5 to 10 feet along the length of the water.

Additionally, note that if earth-disturbing activities will take place on both sides of a Water of this State, ~~i.e., the water that flows through the your site, to the required extent that you are establishing a buffer around this water, it must be established on both sides of the waterbody.~~ For example, if a permittee chooses ~~compliance~~ you choose Stream Protection Zone alternative 1, and ~~the your~~ project calls for earth disturbances on both sides of a small stream, ~~you would need to retain the full 50 feet of buffer would need to be retained on both sides of the water. However, if earth-disturbing your construction activities will only occur on one side of the stream, the 50-foot buffer you would only need to be retained retain the 50-foot buffer on the side of the stream where the earth disturbance will occur.~~

Formatted: Default Paragraph Font, Font: Calibri

Formatted: Hyphenate

Formatted: Default Paragraph Font, Font: Calibri

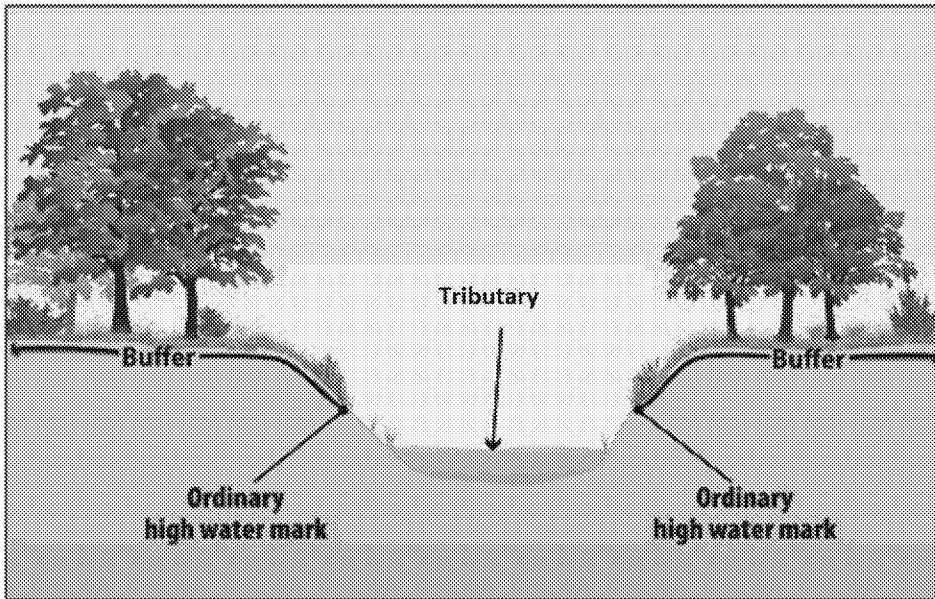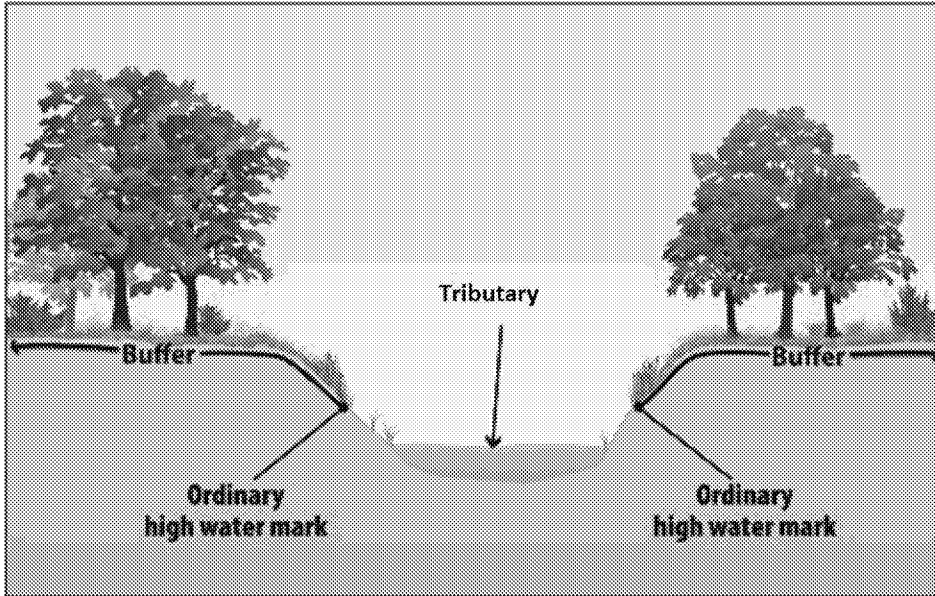

Formatted: Default Paragraph Font, Font: Calibri

Formatted: Hyphenate

Formatted: Default Paragraph Font, Font: Calibri

Figure B- 2 – Stream Protection Zones and natural buffers are measured from the ordinary high water mark of the water body, as indicated by a clear natural line impressed on the bank, shelving, changes in the character of the soil, destruction of terrestrial vegetation, and/or the presence of litter/debris, or the edge of the river bank, whichever is further landward.²

Formatted: Font color: Black

Formatted: Normal, Space After: 10 pt, Border: Top: (No border), Bottom: (No border), Left: (No border), Right: (No border), Between : (No border)

Commented [A6]: This is part of it, too; in this figure, it appears that the edge of the river bank would be further landward than the high water mark. It would be helpful for permittees to see a diagram of the difference.

Formatted: Font color: Black

Formatted: Default Paragraph Font, Font color: Black

Formatted: Font: Bold, Font color: Black

² Alternatively, if the appropriate approval authority has an equivalent method for calculating a 50 foot Stream Protection Zone in a Tier I watershed, that is not less restrictive, for sake of consistency you can use that delineation.

Formatted: Font: 10 pt, Font color: Black

Formatted: Font color: Black

Formatted: Default Paragraph Font, Font: Calibri

Formatted: Hyphenate

Formatted: Default Paragraph Font, Font: Calibri

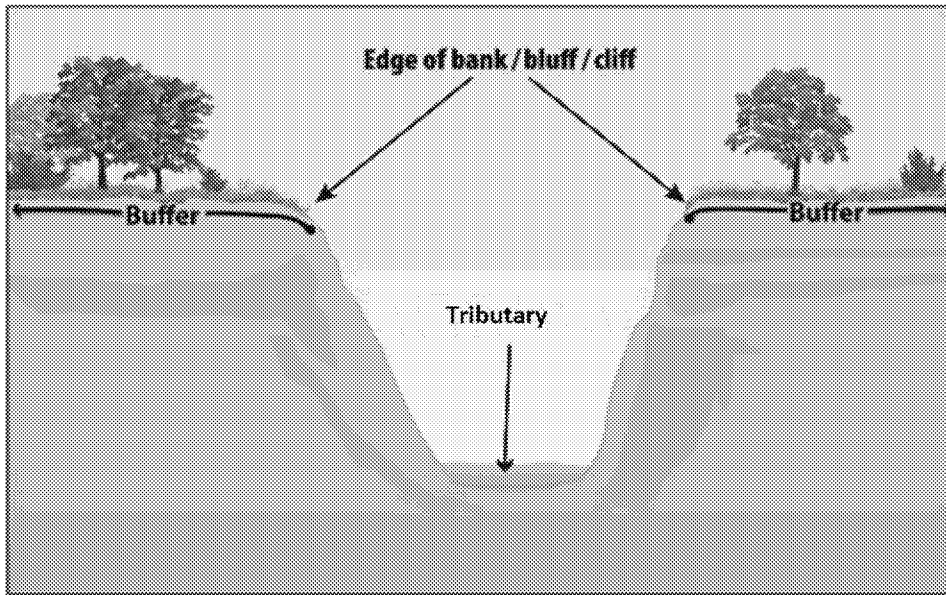
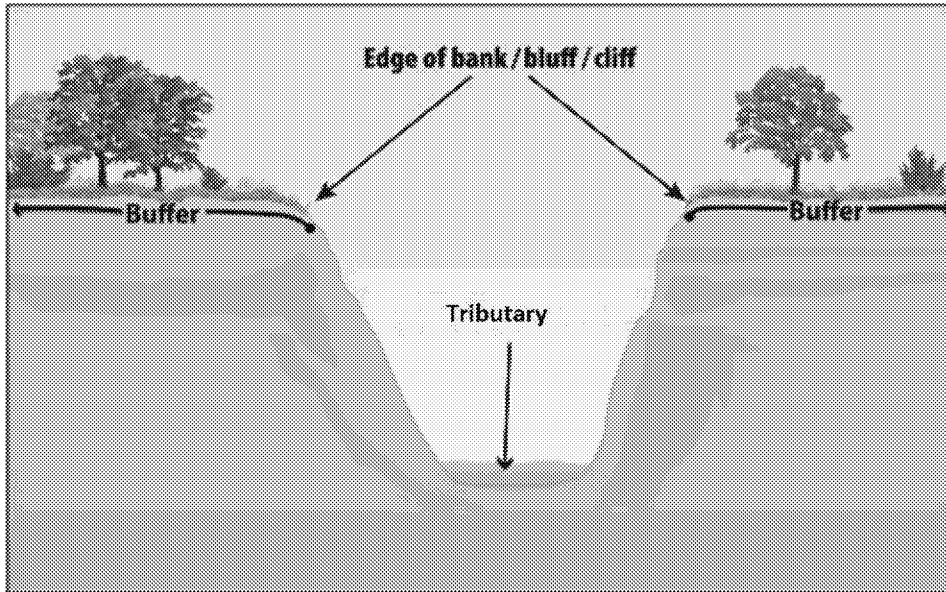


Figure B- 3 -- Stream Protection Zones and natural buffers are measured from the edge of the bank, bluff, or cliff, whichever is applicable.³

Limits to Disturbance Within the Stream Protection Zone

If avoidance of earth disturbances in a Stream Protection Zone is not possible, then minimization of the project's footprint shall be implemented. Permittees ~~you~~ are considered to be in compliance with the requirement to provide and maintain a natural buffer if ~~you retain and protect from construction activities the natural buffer that existed prior to the commencement of construction is retained and protected from construction activities.~~ If the Stream Protection Zone contains no vegetation prior to the commencement of construction (e.g., sand or rocky surface), ~~there is no requirement you are not required~~ to plant vegetation. As noted above, any preexisting structures or impervious surfaces may ~~be allowed occur~~ in the natural buffer area ~~provided that you retain and protect from disturbance the~~ buffer areas outside of the preexisting disturbance ~~are retained and protected from disturbance.~~

To ensure that the water quality protection benefits of the buffer ~~are retained~~ buffers during construction, ~~permittees you~~ are prohibited from conducting any earth-disturbing activities within the buffer during the entire period of permit coverage. In furtherance of this requirement, prior to commencing earth-disturbing activities on ~~your~~ site, ~~permittees you~~ must delineate, and clearly mark off, with flags, tape, or a similar marking device, the buffer area on ~~your~~ site. The purpose of this requirement is to make the buffer area clearly visible to the people working on ~~your~~ site so that unintended disturbances are avoided.

While ~~permittees you~~ are not required to enhance the quality of the vegetation that already exists within the buffer, ~~they you~~ are encouraged to do so where such improvements will enhance the water quality protection benefits of the buffer. (Note that any disturbances within the Stream Protection Zone related to buffer enhancement are permitted and do not constitute construction disturbances.) For instance, a ~~permittee you~~ may want to target plantings where limited vegetation exists, or replace existing vegetation where invasive or noxious plant species (see <http://plants.usda.gov/java/noxiousDriver>) have taken over. In the case of invasive or noxious species, ~~permittees you~~ may want to remove and replace them with a diversity of native trees, shrubs, and herbaceous plants that are well-adapted to the climatic, soil, and hydrologic conditions on the site. ~~Permittees You~~ are also encouraged to limit the removal of naturally deposited leaf litter, woody debris, and other biomass, as this material contributes to the ability of the buffer to retain water and filter pollutants.

If a portion of the buffer area adjacent to the Waters of this State is owned by another party and is not under ~~the your~~ control of the permittee, ~~the permittee is, you are~~ only required to retain and protect ~~from construction activities the portion of the buffer area that is under their your control from construction activities.~~ For example, if a ~~permittee complies you comply with compliance~~ Stream Protection Zone alternative 1 (avoid Stream Protection Zone), but 10 feet of land immediately adjacent to the Water of this State is owned by a different party than the land on which ~~the your~~ construction

³ Alternatively, if the appropriate approval authority has an equivalent method for calculating a 50 foot Stream Protection Zone in a Tier I watershed, that is not less restrictive, for sake of consistency you can use that delineation.

Formatted: Default Paragraph Font, Font: Calibri

Formatted: Hyphenate

Formatted: Default Paragraph Font, Font: Calibri

Formatted: Font color: Black

Formatted: Normal, Space After: 10 pt, Border: Top: (No border), Bottom: (No border), Left: (No border), Right: (No border), Between : (No border)

Commented [A7]: Similar comment as made on Figure B-2.

Formatted: Font color: Black

Formatted: Default Paragraph Font, Font color: Black

Formatted: Font: Bold, Font color: Black

Commented [A8]: Term in M54 regulations. Not applicable here.

Commented [A9]: Is this allowed even if the existing buffer is less than 50 feet?

Commented [A10]: How can this be considered as maintaining a buffer if there is no vegetation and it is impervious?

Commented [A11]: This seems confusing to me. I thought that Alternative #2 allowed disturbance within the 50' buffer area as long as additional E&S controls are used?

Formatted: Font: 10 pt, Font color: Black

Formatted: Font color: Black

Formatted: Default Paragraph Font, Font: Calibri

Formatted: Hyphenate

Formatted: Default Paragraph Font, Font: Calibri

activities are taking place and the permittee does not have control over that land, the permittee must only retain and protect from construction activities the 40-foot buffer area that occurs adjacent to the property on which the construction activities are taking place. The Department would consider permittees to be in compliance with this requirement regardless of the activities that are taking place in the 10-foot area that is owned by a different party than the land on which your construction activities are taking place that you have no control over.

Discharges to the Buffer

Permittees You must ensure that all discharges from the area of earth disturbance to the natural buffer are first treated by the site's erosion and sediment controls (for example, you must comply with the Part III.A.2.e requirement to install sediment controls along any perimeter areas of the site that will receive pollutant discharges), and if necessary to prevent erosion caused by stormwater flows within the buffer, you must use velocity dissipation devices must be used.

Discharges from a project into existing riparian buffers shall be non-erosive. Non-erosive discharges shall be attained through true sheet flow conditions, where the width of the flow path is at least as wide as the flow length, or a stable channel or pipe. Adequately designed outlet protection, including but not limited to rock outlets or plunge pools, shall be provided for all concentrated discharges into the stream, unless supporting evidence is provided that the flows are non-erosive, or the stream is already protected from erosion.

The purpose of this requirement is to decrease the rate of stormwater flow and encourage infiltration so that the pollutant filtering functions of the buffer will be achieved. To comply with this requirement, construction operators typically will use devices that physically dissipate stormwater flows so that the discharge entering the buffer is spread out and slowed down.

E&SC Documentation

All additional controls needed to meet Stream Protection Zone requirements in Tier II watersheds shall be clearly marked on the erosion and sediment control plan and approved by the appropriate approval authority pursuant to COMAR 26.17.01. Permittees You are required to document in the your E&SC plan the natural buffer width that is retained. For example, if you are complying with alternative 1, you must specify in your E&SC Plan that you are providing a 50-foot buffer. Or, if you will be complying with alternative 2, you must document in the E&SC Plan the reduced width of the buffer you will be retaining (and you must also describe the additional erosion and sediment controls you will use). Note that you must also show any Stream Protection Zones on the your site map in your SWPPP (if required under the conditions of Part III.F.1). Additionally, if any disturbances related to the exceptions in Part 3 of this Appendix occur within the buffer area, you must document this in the SWPPP.

Formatted: Line spacing: single

5. Guidance for Providing Additional Erosion and Sediment Controls

Formatted: Font: Calibri

Formatted: Indent: Left: 0", Outline numbered + Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0.25" + Indent at: 0.5"

This part of the appendix applies to permittees that you if you choose compliance Stream Protection Zone, alternative 2 (Provide provide and maintain an undisturbed natural buffer that

Formatted: Font: 12 pt

Formatted: Font: 12 pt

Formatted: Font: 12 pt

Formatted: Default Paragraph Font, Font: Calibri

Formatted: Hyphenate

Formatted: Default Paragraph Font, Font: Calibri

is less than the specific Stream Protection Zone and is supplemented by additional erosion and sediment controls).

Formatted: Font: 12 pt

Determine Whether it is Feasible to Provide a Reduced Buffer

The Department recognizes that there will be a number of situations in which it will be infeasible to provide and maintain a buffer of any width. While some of these situations may exempt you from the buffer requirement entirely (see Part 3 of this Appendix), if you do not qualify for one of these exemptions, there still may be conditions or circumstances at your site that make it infeasible to provide a natural buffer. For example, there may be sites where a significant portion of the property on which the earth-disturbing activities will occur is located within the buffer area, Stream Protection Zone, thereby precluding the retention of certain natural buffer areas. Therefore, you may only choose Stream Protection Zone alternative 2, if it is feasible for you to retain some natural buffer on your site. (Note: For any buffer width retained, you are required to comply with the requirements in Part 4, above, concerning the retention of vegetation and restricting earth disturbances.)

Commented [A12]: I would think that this wouldn't be allowed. What is the purpose of this appendix if you can build a significant portion of the project in the buffer area?

Commented [A13]: This is why there should be a minimum buffer req't, if Alternative 2 is selected.

Design Controls That Provide Additional Sediment Reduction

You must next determine what additional controls are possible on your site that, alone or, The additional selected controls, in combination with any retained natural buffer, from those listed are in this compliance alternative 2, addition to considerations in the Handbook for site soils and slopes.

Commented [A14]: Sentence needs to be reworded.

Note that if only a portion of the natural buffer is less than the Stream Protection Zone, you are only required to implement additional erosion and sediment controls within that portion to achieve the sediment reduction through that area equivalent to the 50 foot buffer. You would not be required to provide additional treatment of stormwater discharges that flow through areas where the natural buffer exceeds the Stream Protection Zone width. See Figure G-4.



Commented [A15]: What reduction is this referring to?

Commented [A16]: In other words, they don't cancel one another out. You can't not do anything on one portion b/c you are doing extra in the other. It may make sense to clarify that further here?

Formatted: Default Paragraph Font, Font: Calibri

Formatted: Hyphenate

Formatted: Default Paragraph Font, Font: Calibri

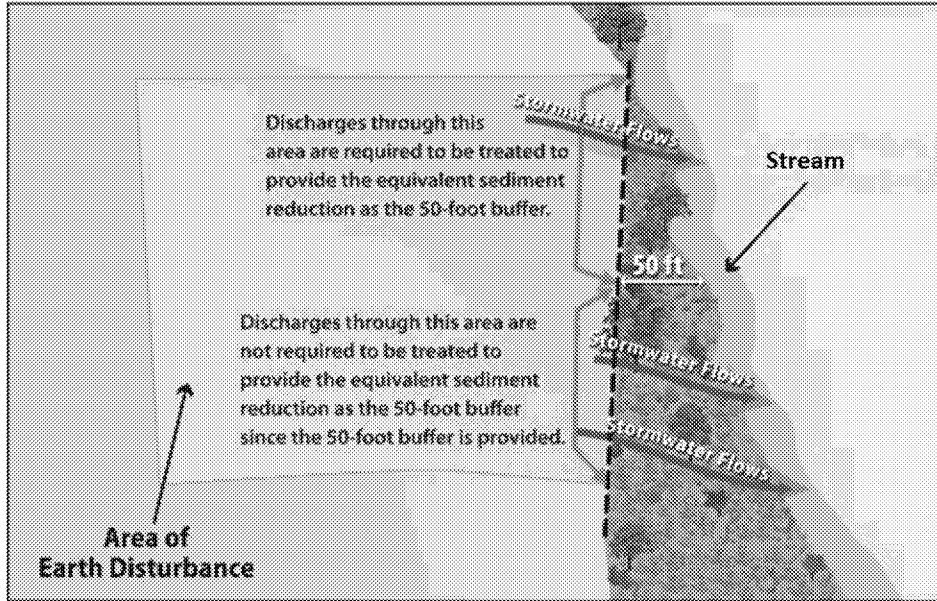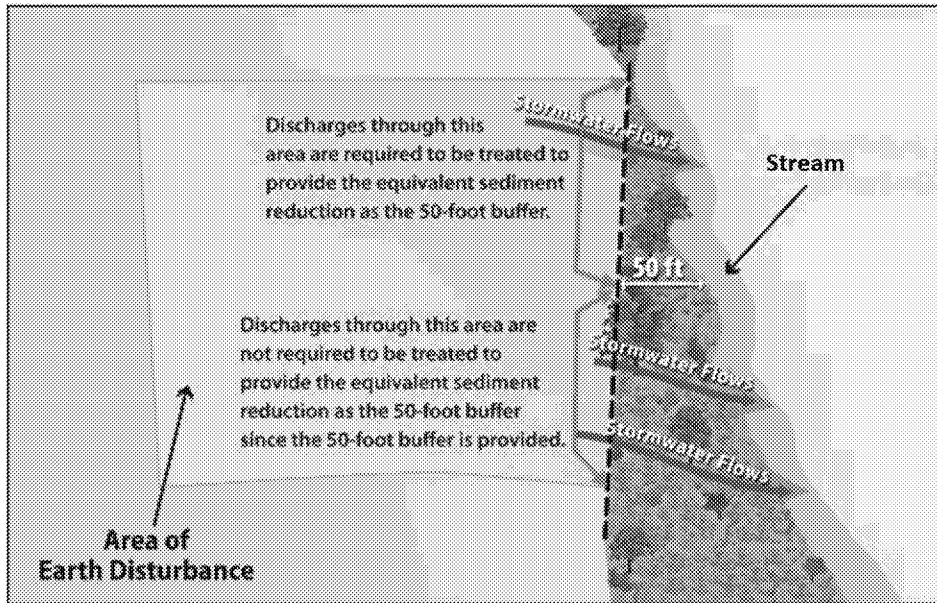

General Discharge Permit No. 20-CP
Appendix B: Page 10 of 10
MERGEFORMAT]

- Formatted: Default Paragraph Font, Font: Calibri
- Formatted: Hyphenate
- Formatted: Default Paragraph Font, Font: Calibri
- Formatted: Font color: Black
- Formatted: Normal, Space After: 10 pt, Border: Top: (No border), Bottom: (No border), Left: (No border), Right: (No border), Between : (No border)
- Formatted: Font: Bold, Font color: Black
- Formatted: Line spacing: single

Figure B-4 - Example of how to comply with the requirement to provide the equivalent sediment reduction when only a portion of your earth-disturbances discharge to a buffer of less than 50- feet.